



Product Guide

NEXEN SOLID TIRES

www.nexensolidtire.com

NEXEN SOLID TIRES

> SOLID RESILIENT TIRES



SOLIDPRO TRACTION & SMOOTH THE BEST SOLUTION FOR MATERIAL HANDLING

Multi-tread Pattern
Advanced Performance
Low Vibration
Non-marking, CLIP(EF) mount



ALL-PRO HP TRACTION ALTERNATIVE SOLUTION

Cross Bar X Pattern
Powerful Performance
CLIP(EF) mount

> OE Supply



As the first genuine solid tire, NEXEN solid tires have been certified its quality by several renowned OE forklift manufacturers. Based on its approved quality, technical, and development cooperation, NEXEN supplies solid tires to the valuable customers competing with other global top brands in the business all over the world.

> Made in KOREA

All NEXEN products are manufactured in Korea with strict quality control procedures. Furthermore, NEXEN regularly implements its factory tour for OE and overseas customers.

> Eco Friendly

All NEXEN products include eco-friendly materials only coinciding with REACH regulation.



> PRESS-ON TIRES



NEXEN TRACTION & SMOOTH
VARIOUS PATTERNS FOR DIFFERENT WORKS

Classic Patterns (LUG/PL/RIB)
High Load Capacity
Low Heat Build-up
Non-marking, CLIP(EF) mount



NEXEN POB TRACTION & SMOOTH
FOR WAREHOUSES AND INDOOR WORKPLACES

MTA and Classic Patterns (MS/PL/RIB)
High Fuel-efficiency
Non-marking



DOOSAN Pro5 Series D25SE 6.50-10 (5.00F)

SPECIAL USAGES

> SEAPORTS & CONTAINER TERMINALS



Port Trailer



Reach Stacker



Container Handler

Tires are the most important parts in safety at heavy load workplaces.
Based on its great stability, NEXEN Solid Tires have been supplied to various seaports and container terminals in the world.

> AIRPORTS (GSE)



Dolly



Deck Loader



Boarding Bridge

NEXEN Solid Tires provide maintenance cost reduction equipped on various GSE.
It is compatible with passenger boarding bridges and GSEs which are carrying baggage.

> Other Special Vehicles (Steel Mills, Shipyards)



Slag Pot Carrier



Scrap Iron and Auto Iron Junkyard



Wharf

You will be able to save your money by replacing your tires with NEXEN Solid Tires from tire damages and frequent tire replacement.

(scissor lifts, cherry picker, aerial work platforms, steel mill trailers, marina lift trucks, iron coil transporter, and etc.)



HYUNDAI Rotem Aero-bridge 40X16X30

SPECIFICATIONS

Solid Resilient Tires

SOLIDPRO (MTP)



SIZE	RIM	CLIP (EF)	O.D mm	W.D mm	Load Capacity(kg)						Weight kg	
					Forklift Ttruck*		Others			Static		
					Load	Steer	~6km/h	~10km/h	~25km/h	0km/h		
4 inch												
3.00 - 4	2.10	O	252	85	260	195	260	235	195	295	3.5	
4.00 - 4	2.50C	O	306	105	535	412	535	485	412	620	7.0	
5 inch												
3.50 - 5	2.50C	O	293	99	540	420	540	500	420	605	5.7	
	3.00SP	O	293	99	540	420	540	500	420	605	6.0	
8 inch												
4.00 - 8	3.00D	O	405	116	950	730	950	860	730	1100	11.6	
	3.75I	O	405	116	950	730	950	860	730	1100	11.9	
5.00 - 8	3.00D	O	458	125	1415	1090	1415	1285	1090	1645	15.8	
	3.25I	O	458	125	1415	1090	1415	1285	1090	1645	16.0	
	3.75I	O	458	125	1415	1090	1415	1285	1090	1645	16.3	
15 X 4 1/2 - 8 (125 / 75 - 8)	3.00D	O	376	115	1040	800	1040	945	800	1210	9.2	
	3.25I	O	376	115	1040	800	1040	945	800	1210	9.6	
16 X 6 - 8 (150 / 75 - 8)	4.33R	O	419	152	1495	1150	1495	1360	1150	1740	15.8	
18 X 7 - 8 (180 / 70 - 8)	4.33R	O	454	156	2145	1650	2145	1945	1650	2490	20.5	
18 X 9 - 8	7.00E	O	462	208	2300	1900	2300	2090	1900	2945	29.5	
9 inch												
15 X 5 1/2 - 9 (140 / 55 - 9)	4.00E	O	384	131	1170	900	1170	1060	900	1360	10.3	
6.00 - 9	4.00E	O	530	139	1885	1450	1885	1710	1450	2190	26.5	
21 X 8 - 9 (200 / 75 - 9)	6.00E	O	518	184	2755	2120	2755	2500	2120	3200	32.5	
10 inch												
180 / 60 - 10	5.00F	O	462	162	2410	1850	2410	2180	1850	2795	20.1	
200 / 50 - 10	6.50F	O	457	198	2470	1900	2470	2240	1900	2870	24.1	
6.50 - 10	5.00F	O	580	172	2340	1800	2340	2125	1800	2720	35.8	
	5.50F	O	580	172	2340	1800	2340	2125	1800	2720	36.0	
23 X 9 - 10 (225 / 75 - 10)	6.50E	O	583	204	3445	2650	3445	3125	2650	4000	46.3	
7.50 - 10	5.00F	O	630	192	3070	2360	3070	2785	2360	3565	50.7	
	5.50F	O	630	192	3070	2360	3070	2785	2360	3565	51.0	
12 inch												
7.00 - 12	5.00S	O	653	172	2920	2240	2920	2645	2240	3380	45.6	
23 X 10 - 12 (250 / 60 - 12)	8.00G	O	589	240	3770	2900	3770	3420	2900	4380	51.9	
315 / 45 - 12 (23 X 12 - 12)	10.00G	O	574	285	4485	3450	4485	4070	3450	5210	54.7	
27 X 10 - 12 (250 / 75 - 12)	8.00G	O	676	246	3900	3000	3900	3540	3000	4530	72.5	
13 inch												
23 X 5 (150 / 100 - 13)	3.75P	O	622	140	1495	1150	1495	1360	1150	1735	31.4	
15 inch												
8.15 - 15 (28 X 9 - 15, 225 / 75 - 15)	7.00	O	696	212	3445	2650	3445	3125	2650	4380	58.9	
28 X 12.5 - 15 (355 / 45 - 15)	9.75	O	711	310	5525	4250	5525	5015	4250	6420	91.3	
32 X 12.1 - 15	9.75	O	818	299	6500	5000	6500	5900	5000	9060	118.8	
355 / 65 - 15	9.75	O	822	300	7800	6000	7085	6430	5450	9060	126.3	
250 - 15 (250 / 70 - 15)	7.00	O	716	226	4745	3650	4745	4310	3650	5510	66.1	
	7.50	O	716	226	4745	3650	4745	4310	3650	5510	67.5	
300 - 15 (315 / 70 - 15)	8.00	O	820	266	5850	4500	5850	5310	4500	6795	109.0	
6.00 - 15	4.50E	O	693	155	2455	1820	2455	2095	1820	3165	43.0	
7.00 - 15	5.50	O	734	175	3545	2725	3545	3215	2725	4115	56.1	
	6.00	O	734	175	3545	2725	3545	3215	2725	4115	56.4	
7.50 - 15	5.50	O	755	197	3900	3000	3900	3540	3000	4530	65.9	
	6.00	O	755	197	3900	3000	3900	3540	3000	4530	67.0	
	6.50	O	755	197	3900	3000	3900	3540	3000	4530	67.6	
8.25 - 15	5.50	O	814	202	4615	3550	4615	4190	3550	5510	80.6	
	6.50	O	814	202	4750	3650	4750	4300	3650	5510	81.0	
400 / 60 - 15	11.00	O	817	332	8970	6900	8970	8140	6900	10350	140.0	



SIZE	RIM	CLIP (EF)	O.D mm	W.D mm	Load Capacity(kg)						Weight kg	
					Forklift Ttruck*		Others			Static		
					Load	Steer	~6km/h	~10km/h	~25km/h	0km/h		
16 inch												
7.50 - 16	5.50	O	780	197	3950	3050	3950	3600	3050	4605	69.8	
	6.00GS	O	780	197	3950	3050	3950	3600	3050	4605	70.1	
8.00 - 16	5.50	-	807	207	4180	3190	4180	3800	3190	4785	83.0	
20 inch												
355 / 50 - 20	10.00	O	825	310	8970	6900	8970	8140	6900	10440	101.6	
9.00 - 20	6.50	-	1017	232	5400	4500	5400	4905	4500	6795	137.2	
	7.00	-	1017	232	5400	4500	5400	4905	4500	6795	137.9	
	7.50	-	1017	232	5400	4500	5400	4905	4500	6795	139.6	
	8.00	-	1017	232	5400	4500	5400	4905	4500	6795	140.6	
10.00 - 20	7.00	-	1024	258	6000	5000	6000	5450	5000	7550	159.6	
	7.50	-	1024	258	6000	5000	6000	5450	5000	7550	160.8	
	8.00	-	1024	258	6000	5000	6000	5450	5000	7550	161.8	
11.00 - 20	7.50	-	1090	280	6540	5450	6540	5940	5450	8230	197.4	
	8.00	-	1090	280	6540	5450	6540	5940	5450	8230	198.7	
12.00 - 20	8.00	-	1092	297	7560	6300	7560	6865	6300	9440	216.3	
	8.50	-	1092	297	7560	6300	7560	6865	6300	9440	217.5	
	10.00	-	1092	297	7800	6500	7800	7085	6500	9770	221.6	
24 inch												
12.00 - 24	8.00	-	1193	297	8040	6700	8040	7305	6700	10040	245.1	
	8.50	-	1193	297	8040	6700	8040	7305	6700	10040	245.5	
	10.00	-	1193	297	9000	7500	8500	7750	7100	10040	251.0	
14.00 - 24	10.00	-	1320	342	11100	9250	11100	10085	9250	13855	372.1	

* Load capacity is based on Counter Balanced Forklift Truck and guaranteed up to 25km/h.



SIZE	RIM	CLIP	O.D	W.D	Load Capacity(kg)						Weight
					Forklift Ttruck*		Others			Static	
			mm	mm	Load	Steer	~6km/h	~10km/h	~25km/h	0km/h	kg
15 inch											
300 - 15 (315 / 70 - 15)	8.00	O	830	266	5850	4500	5850	5310	4500	6795	116.7
20 inch											
355 / 50 - 20	10.00	O	825	310	8970	6900	8970	8140	6900	10440	104.6
10.00 - 20	7.00	-	1015	252	6000	5000	6000	5450	5000	7500	156.0
	7.50	-	1015	252	6000	5000	6000	5450	5000	7500	156.4
	8.00	-	1015	252	6000	5000	6000	5450	5000	7500	157.0

* Load capacity is based on Counter Balanced Forklift Truck and guaranteed up to 25km/h.



SIZE	RIM	CLIP (EF)	O.D mm	W.D mm	Load Capacity(kg)						Weight kg	
					Forklift Ttruck*		Others			Static		
					Load	Steer	~6km/h	~10km/h	~25km/h	0km/h		
8 inch												
5.00 - 8	3.00D	O	458	125	1415	1090	1415	1285	1090	1645	17.1	
15 X 4 1/2 - 8 (125 / 75 - 8)	3.00D	O	376	115	1040	800	1040	945	800	1210	9.6	
16 X 6 - 8 (150 / 75 - 8)	4.33RW	O	419	152	1495	1150	1495	1360	1150	1740	16.2	
18 X 7 - 8 (180 / 70 - 8)	4.33RW	O	454	156	2145	1650	2145	1945	1650	2490	20.7	
9 inch												
15 X 5 1/2 - 9 (140 / 55 - 9)	4.00E	O	384	131	1170	900	1170	1060	900	1360	10.2	
6.00 - 9	4.00E	O	530	139	1885	1450	1885	1710	1450	2190	26.6	
21 X 8 - 9 (200 / 75 - 9)	6.00E	O	518	184	2755	2120	2755	2500	2120	3200	33.4	
10 inch												
200 / 50 - 10	6.50F	O	457	198	2470	1900	2470	2240	1900	2870	24.7	
6.50 - 10	5.00F	O	580	172	2340	1800	2340	2125	1800	2720	35.9	
23 X 9 - 10 (225 / 75 - 10)	6.50E	O	583	204	3445	2650	3445	3125	2650	4000	47.3	
12 inch												
7.00 - 12	5.00S	O	653	172	2920	2240	2920	2645	2240	3380	46.5	
23 X 10 - 12 (250 / 60 - 12)	8.00G	O	589	240	3770	2900	3770	3420	2900	4380	52.6	
27 X 10 - 12 (250 / 75 - 12)	8.00G	O	676	246	3900	3000	3900	3540	3000	4530	75.2	
15 inch												
8.15 - 15 (28 X 9 - 15 ,225 / 75 - 15)	7.00	O	696	212	3445	2650	3445	3125	2650	4380	60.1	
28 X 12.5 - 15 (355 / 45 - 15)	9.75	O	711	310	5525	4250	5525	5015	4250	6420	91.7	
32 X 12.1 - 15	9.75	O	807	299	6500	5000	6500	5900	5000	9060	125.0	
355 / 65 - 15	9.75	O	822	300	7800	6000	7085	6430	5450	9060	133.9	
250 - 15 (205 / 70 - 15)	7.00	O	716	226	4745	3650	4745	4310	3650	5510	68.7	
	7.50	O	716	226	4745	3650	4745	4310	3650	5510	69.2	
300 - 15 (315 / 70 - 15)	8.00	O	812	266	5850	4500	5850	5310	4500	6795	111.4	
7.00 - 15	5.50	O	734	175	3545	2725	3545	3215	2725	4115	57.3	
7.50 - 15	6.50	O	755	197	3900	3000	3900	3540	3000	4530	69.9	
8.25 - 15	6.50	O	814	202	4750	3650	4750	4300	3650	5510	84.3	

* Load capacity is based on Counter Balanced Forklift Truck and guaranteed up to 25km/h.



DOOSAN

Pro Series 18X7-8 (4.33R) 15X4 1/2-8 (3.00D)



SIZE	LUG	PL	RIB	RIM	CLIP (EF)	O.D	W.D	Load Capacity(kg)						Weight**
								Forklift Ttruck*		Others			Static	
						mm	mm	Load	Steer	~6km/h	~10km/h	~25km/h	0km/h	kg
4 inch														
3.00 - 4			o	2.50C	o	250	85	260	195	260	235	195	295	3.5
5 inch														
3.50 - 5	o			2.50C	o	293	99	540	420	540	500	420	630	5.4
8 inch														
2.00 - 8 (100/50-8)		o		2.50C	o	305	98	825	635	825	750	635	955	4.4
3.00 - 8		o		2.50C	o	358	102	875	675	875	800	675	1015	7.8
4.00 - 8	o		o	3.00D	o	405	116	950	730	950	860	730	1100	11.2
	o		o	3.75I	o	405	116	950	730	950	860	730	1100	12.2
5.00 - 8			o	3.75I	o	458	125	1415	1090	1415	1285	1090	1645	17.8
9 inch														
6.00 - 9		o		4.00E	o	530	139	1885	1450	1885	1710	1450	2190	27.2
			o	4.00E	o	535	140	1885	1450	1885	1710	1450	2190	27.1
10 inch														
21 X 7 - 10 (180 / 80 - 10)		o		5.00F	o	520	155	2210	1700	2210	2005	1700	2565	27.8
12 inch														
7.00 - 12		o		5.00S	o	653	172	2920	2240	2920	2645	2240	3380	47.9
16 inch														
9.00 - 16	o			5.50	-	852	232	4430	3405	4430	4010	3405	5110	103.6
	o			6.50	-	852	232	5240	4030	5240	4745	4030	6045	104.1
20 inch														
8.25 - 20		o		6.50	-	934	222	4380	3650	4380	3980	3650	5550	106.6
	o			6.00	-	955	222	4380	3650	4380	3980	3650	5550	117.5
	o			6.50	-	955	222	4380	3650	4380	3980	3650	5550	118.4
	o			7.00	-	955	222	4380	3650	4380	3980	3650	5550	119.8
9.00 - 20	o			6.50	-	1006	232	5400	4500	5400	4905	4500	6795	141.0
	o			7.00	-	1006	232	5400	4500	5400	4905	4500	6795	141.3
	o			8.00	-	1006	232	5400	4500	5400	4905	4500	6795	141.5
10.00 - 20	o			7.50	-	1024	258	6000	5000	6000	5450	5000	7550	158.4
	o			8.00	-	1024	258	6000	5000	6000	5450	5000	7550	162.0
12.00 - 20		o	o	8.00	-	1092	297	7560	6300	7560	6865	6300	9440	224.6
		o	o	8.50	-	1092	297	7560	6300	7560	6865	6300	9440	225.8
		o	o	10.00	-	1092	297	7800	6500	7800	7085	6500	9770	231.9

* Load capacity is based on Counter Balanced Forklift Truck and guaranteed up to 25km/h.

** There might be a little difference in weight depending on its pattern in the same size.



SIZE		MTA	MS	PL	RIB	O.D	W.D	Load Capacity(kg)*						Others	Weight**
								~10km/h		~16km/h		~25km/h			
inch	mm					mm	mm	Load	Steer	Load	Steer	Load	Steer	~16km/h	kg
Caster															
	178 X 73 ***			o		178	73			320					3.9~6.5
	180 X 75			o		180	75			320					7.8
	204 X 70			o		204	70			350					8.0
	204 X 76 ***			o		204	76			370					7.6~7.9
	254 X 60			o		254	60								7.8
	254 X 100				o	254	100			980					6.0
	255 X 120				o	255	120			1350					9.1
POB															
9 X 5 X 5	229 X 127 - 127			o		229	127	960	790	855	715	695	570	680	6.6
	254 X 100				o	254	100								6.5
	254 X 102				o	254	102								8.7
	254 X 114				o	254	114								6.9
10 X 5 X 6 1/4	254 X 127				o	254	127								7.8
10 X 4 3/4 X 6 1/2	254 X 121 - 165.1			o		254	121	950	780	845	710	690	565	675	8.0
10 X 5 X 6 1/2	254 X 127 - 165.1	o		o	o	254	127	1010	830	905	760	735	605	725	8.3
10 1/2 X 5 X 6 1/2	267 X 127 - 165.1				o	267	127	1070	880	960	810	780	640	770	9.0
	255 X 120				o	255	120								9.1
	280 X 135		o		o	280	135								9.6
	300 X 80				o	300	80								6.2
12 X 5 X 7 1/8	305 X 127			o	o	305	127								9.3
12 X 5 3/4 X 7 1/8	305 X 145			o	o	305	145								10.7
	305 X 152				o	305	152								13.5
12 X 4 1/2 X 8	305 X 114 - 203.2				o	305	114	1040	855	930	780	755	620	745	8.8
12 X 5 1/2 X 8	305 X 140 - 203.2				o	305	140	1340	1100	1195	1005	970	795	955	10.9
	315 X 145		o		o	315	145								11.7
	330 X 145				o	330	145								13.6
	343 X 140				o	343	140								13.3
13 1/2 X 5 1/2 X 8	343 X 140 - 203.2	o	o	o		343	140	1510	1240	1345	1130	1095	895	1080	12.9
	343 X 152				o	343	152								20.0
13 1/2 X 6 X 8	343 X 152 - 203.2			o		343	152	1560	1280	1380	1160	1120	920	1115	13.9
14 X 4 1/2 X 8	356 X 114 - 203.2	o		o		356	114	1170	960	1045	875	850	695	830	11.1
14 X 5 X 10	356 X 127 - 254				o	356	127	1335	1095	1195	1000	970	795	955	11.6
	380 X 165				o	380	165								18.0
	382 X 142			o		382	142								16.6
16 X 5 X 10 1/2	406 X 127 - 266.7	o	o	o		406	127	1510	1240	1345	1130	1095	895	1080	13.2
16 X 6 X 10 1/2	406 X 152 - 266.7	o	o	o		406	152	1910	1570	1710	1435	1390	1140	1360	16.3
16 X 7 X 10 1/2	406 X 178 - 266.7	o		o		406	178	2325	1910	2070	1740	1685	1380	1660	20.4
15 X 5 X 11 1/4	381 X 127 - 285.8				o	381	127	1390	1140	1240	1040	1010	830	990	12.3
15 X 6 X 11 1/4	381 X 152 - 285.8				o	381	152	1715	1410	1530	1285	1245	1020	1225	14.6
16 1/4 X 5 X 11 1/4	413 X 127 - 285.8	o		o		413	127	1530	1250	1360	1145	1105	905	1090	14.4
16 1/4 X 6 X 11 1/4	413 X 152 - 285.8	o	o	o		413	152	1920	1580	1715	1440	1395	1140	1370	16.6
16 1/4 X 7 X 11 1/4	413 X 178 - 285.8			o	o	413	178	2325	1900	2060	1735	1680	1380	1650	20.0

* Load capacity is based on Counter Balanced Forklift Truck. For other vehicles, please refer to "Others."

** There might be a little difference in weight depending on its pattern in the same size.

*** As tire type and its weight can be different depending on forklift model, please consult its forklifts manufacturer and tires supplier for appropriate product.



SIZE		MTA	MS	PL	RIB	O.D	W.D	Load Capacity(kg)*						Others	Weight**
								~10km/h		~16km/h		~25km/h			
inch	mm					mm	mm	Load	Steer	Load	Steer	Load	Steer	~16km/h	kg
	405 X 130 - 305			o		405	130	1510	1240	1350	1135	1100	900	2560	12.5
17 X 5 X 12 1/8	432 X 127 - 308			o		432	127	1570	1290	1400	1180	1145	935	1120	14.5
17 X 6 X 12 1/8	432 X 152 - 308			o		432	152	1980	1630	1770	1485	1435	1180	1410	17.6
18 X 5 X 12 1/8	457 X 127 - 308			o	o	457	127	1640	1350	1470	1230	1195	980	1170	16.8
18 X 6 X 12 1/8	457 X 152 - 308		o	o	o	457	152	2100	1720	1870	1575	1525	1250	1500	19.4
18 X 7 X 12 1/8	457 X 178 - 308		o	o	o	457	178	2550	2100	2280	1910	1855	1520	1820	22.4
18 X 8 X 12 1/8	457 X 203 - 308		o	o	o	457	203	3000	2475	2680	2250	2180	1790	2150	26.0
18 X 9 X 12 1/8	457 X 229 - 308			o	o	457	229	3450	2850	3090	2600	2510	2060	2475	29.3
21 X 5 X 15	533 X 127 - 381			o		533	127	1840	1510	1640	1385	1335	1095	1320	20.1
21 X 6 X 15	533 X 152 - 381			o	o	533	152	2350	1930	2100	1765	1710	1400	1680	25.1
21 X 7 X 15	533 X 178 - 381		o	o	o	533	178	2875	2350	2560	2150	2085	1710	2050	31.2
21 X 8 X 15	533 X 203 - 381		o	o	o	533	203	3375	2775	3025	2540	2455	2015	2425	34.8
21 X 9 X 15	533 X 229 - 381				o	533	229	3900	3200	3475	2920	2830	2320	2775	42.3
20 X 8 X 16	508 X 203 - 406.4			o	o	508	203	3010	2470	2685	2255	2185	1790	2150	30.5
20 X 9 X 16	508 X 229 - 406.4			o	o	508	229	3445	2830	3075	2580	2500	2050	2460	34.0
22 X 8 X 16	559 X 203 - 406.4			o		559	203	3500	2875	3130	2625	2545	2085	2500	38.0
22 X 9 X 16	559 X 229 - 406.4		o	o	o	559	229	4050	3325	3600	3025	2930	2400	2875	42.1
22 X 12 X 16	559 X 305 - 406.4		o		o	559	305	5625	4625	5030	4225	4090	3350	4025	57.4
	645 X 250 - 410				o	645	250	4810	3930	4180	3430	3400	2720	3125	72.4
28 X 16 X 20	711 X 406 - 500				o	711	406	9735	8000	8695	7300	7055	5795	6950	134.3
28 X 12 X 22	711 X 305 - 559				o	711	305	6740	5540	6020	5060	4900	4015	4820	87.0
40 X 16 X 30 ***	1016 X 406 - 762				o	1016	406	12420	10160	10810	8870	8550	7095	8060	152.8

* Load capacity is based on Counter Balanced Forklift Truck. For other vehicles, please refer to "Others."

** There might be a little difference in weight depending on its pattern in the same size.

*** This is tire-hub wheel assembled product. Its weight includes hub weight.



> SIDEWALL GUIDE

LOT number

2411

24 WEEK **11** YEAR


; Produced in 24th week of 2011.

RIM size

TIRE size

COUNTRY OF ORIGIN

J-Line

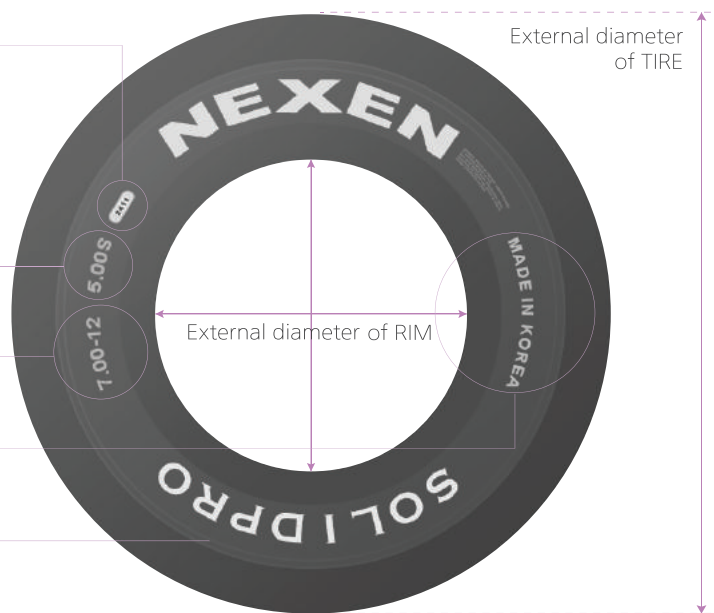



CLARK
THE FORKLIFT 8.25-15 (6.50)

> HOW TO READ TIRE SIZE

SOLID RESILIENT TIRES



PRESS-ON TIRES

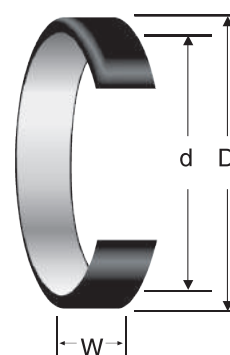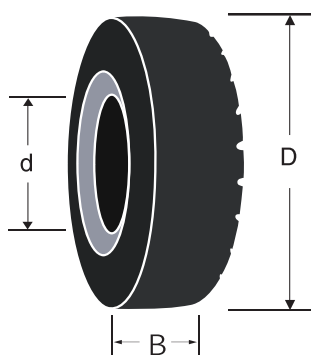

Type of tire	Indication	Example
Pneumatic shaped tire	B - d	7.00 - 12
Low profile tire	D X B - d	18 X 7 - 8
Trolley tire	D X B	23 X 5
Trailer tire	B - d	300 - 15

Type of tire	Indication	Example
Press-on Tire	D X W X d (inch)	18 X 8 X 12 1/8
	D X W - d (mm)	457 X 203 - 308

> CONTACT US

5F NEXEN Gangnam Tower, 226, Bangbae-ro, Seocho-gu, Seoul, KOREA 06584

T. +82 2 6420 0651~0653 **F.** +82 2 6009 9094

solidtire@nexentire.com

www.nexensolidtire.com



Copyright © NEXEN CORPORATION. All Rights Reserved.

